


Approval certificate

Trade waste pre-treatment product

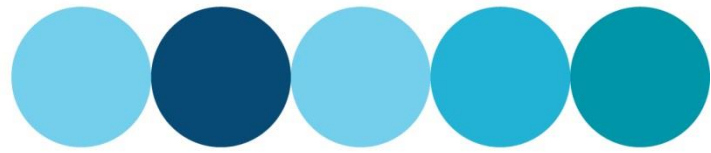

Applicant: Eclipse Environmental Australia Pty Ltd
Postal address: 73 Victoria Street Smithfield NSW 2164

Manufacturer: Eclipse Environmental Australia Pty Ltd
Address: 73 Victoria Street Smithfield NSW 2164

Attention: Richard Laferla
Web: www.eclipseaustralia.com.au
Email: richard@eclipseaustralia.com.au

Product description

The Eclipse range of conventional passive grease arrestors are designed to trap and remove grease, fat and oil from commercial kitchens. Eclipse passive grease arrestors are manufactured from fibreglass or stainless steel.

The product range offers six different sizes for each material of construction type.

The approval certificate applies to the pre-treatment products of the following sizes:

Approval Number	Model	Make	Installation Type ¹	Capacity (L)	Width ² (mm)	Length ² (mm)	Height ³ (mm)	Access Lid Type	Inlet/Outlet Diameter (mm)	Inlet Height ⁴ (mm)	Outlet Height ⁴ (mm)
AN-102-01	GA1000S	Stainless Steel	Both	1,000	600	1,500	1,600	Cast iron concrete infill	100	1,300	1,200
AN-102-02	GA1500S	Stainless Steel	Both	1,500	750	1,800	1,600	Cast iron concrete infill	100	1,300	1,200
AN-102-03	GA2000S	Stainless Steel	Both	2,000	800	2,000	1,750	Cast iron concrete infill	100	1,400	1,300
AN-102-04	GA3000S	Stainless Steel	Both	3,000	1,000	2,400	1,800	Cast iron concrete infill	100	1,400	1,300
AN-102-05	GA4000S	Stainless Steel	Both	4,000	1,100	3,000	1,800	Cast iron concrete infill	100	1,400	1,300
AN-102-06	GA5000S	Stainless Steel	Both	5,000	1,200	3,400	1,900	Cast iron concrete infill	100	1,400	1,300
AN-102-07	GA1000F	Fibre Glass	Both	1,000	600	1,500	1,600	Cast iron concrete infill	100	1,300	1,200
AN-102-08	GA1500F	Fibre Glass	Both	1,500	750	1,800	1,600	Cast iron concrete infill	100	1,300	1,200
AN-102-09	GA2000F	Fibre Glass	Both	2,000	800	2,000	1,750	Cast iron concrete infill	100	1,300	1,200
AN-102-10	GA3000F	Fibre Glass	Both	3,000	1,000	2,400	1,800	Cast iron concrete infill	100	1,400	1,300
AN-102-11	GA4000F	Fibre Glass	Both	4,000	1,100	3,000	1,800	Cast iron concrete infill	100	1,400	1,300
AN-102-12	GA5000F	Fibre Glass	Both	5,000	1,200	3,400	1,900	Cast iron concrete infill	100	1,400	1,300


1: Above or Below Ground; 2: Internal; 3: Not including lid cover; 4: From base of tank to pipe centreline.

Special conditions of approval

- The product shall be *supplied* with manufacturer's installation instructions and recommended procedures for operation and maintenance.
- The product shall be *installed* by a licensed plumber and *serviced* strictly in accordance with the manufacturer's written instructions, with particular emphasis on the following:
 - Fiberglass & Stainless Steel Grease Arrestor Manual (Rev 2.31, dated 23 May 2024)*
- This approval certificate is not a stand-alone document and **must be read** in conjunction with the following Water Corporation documents:
 - [Typical Drawings for Trade Waste – Grease Arrestor \(HX33-10-00\)](#)
 - [Typical Drawings for Trade Waste – Trade Waste Sampling Point \(HX33-11-30\)](#)
 - [Typical Drawings for Trade Waste – Venting of trade waste grease arrestors and sealed trade waste sampling points \(HX33-10-10\)](#)
 - [Grease Arrestor Installation Guidelines](#)
- A maintenance contract is to be in place to ensure the ongoing reliability of the product and that discharges to sewer comply with Water Corporation's [Acceptance Criteria for Trade Waste](#).
- Water Corporation must be notified within fourteen (14) days upon installation of the product.
- The use of emulsifying agents upstream of the product must not occur. Such instructions must be noted on operating documentation.

Approval certificate

Trade waste pre-treatment product

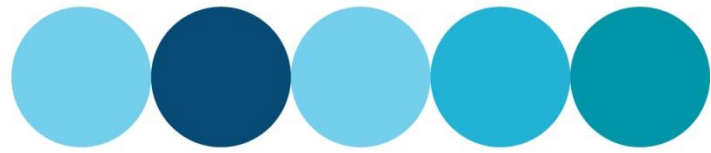

Special conditions of approval (continued)

7. The product chosen must be suitably sized to avoid surge conditions.
8. Clear access for the purposes of maintenance or servicing of the pre-treatment device must be maintained at all times.
9. This approval certificate is not an endorsement of the product by Water Corporation, and no claim shall be made in advertising, promotion or other manner to the effect.
10. Water Corporation accepts no responsibility for the effective operation, performance or efficiency of the product. This approval is not an engineering approval or structural endorsement.
11. The proponent of the approved product must formally seek a request for re-approval of the product no later than three (3) months before the assigned **Validity Period** has expired from the **Date Issued** of this approval certificate.
12. Water Corporation reserves the right to vary any requirements at any time. Any application of this condition normally occurs after consultation with the manufacturer, supplier and end business user connected to Water Corporation's sewer.
13. Water Corporation shall be notified in writing if the pre-treatment device is withdrawn from sale.
14. The proponent of the approved product accepts that the information provided in this document shall be made publicly available.

General conditions of approval

Approval shall be **suspended** where any of the following conditions are not met:

1. If there is a breach of the Special Conditions.
2. The assigned **Validity Period** has expired from the **Date Issued** of this approval certificate.
3. The product shall be manufactured in accordance with Water Corporation's requirements at the time of approval.
4. The product shall be manufactured to comply according to the details noted in the listed drawings below, in addition to any further details provided by the proponent when seeking this approval.
5. The product supplied for use in Water Corporation's area of operations shall comply with the requirements shown on this approval certificate. Sizes, classes, lengths or other product variables which are available with the product but which are not approved as listed on this approval certificate shall not be offered by the supplier for use in Water Corporation's area of operations.
6. All discharges to sewer associated with this product must not exceed Water Corporation's *Trade Waste Acceptance Criteria*. Where the discharge *has* or is *likely* to exceed the *Trade Waste Acceptance Criteria* then the Corporation may direct a *specific* or *ongoing* maintenance requirement to be followed.
7. Prior to any business (which is connected to Water Corporation's sewer) installing this product the business must apply to Water Corporation for a *Trade Waste Permit* for approval to discharge.
8. If this certificate has been issued to the manufacturer of this product then it is the responsibility of the manufacturer to ensure all current and future suppliers / vendors of this product are provided a copy of this approval certificate.

Approval shall be **reviewed** where any of the following conditions occur:

1. The product is manufactured with either different materials, methods of manufacture, location of manufacture, source of raw materials, component subcontractors or models to that at the time of approval.
2. The ownership of the primary manufacturer or any subcontractors is varied from that at time of approval.
3. The standards and/or specifications to which the product was required to comply with at the time of approval have been amended or revised. It is the responsibility of the proponent to immediately advise Water Corporation of any changes to the proponent's drawings and installation, operation and maintenance manuals made at the time of approval.
4. The product has been found to sustain damage or provide unsatisfactory performance on a number of occasions considered excessive by Water Corporation, when handled, stored, assembled or installed in accordance with the supplier's or manufacturer's written instructions.

Approved drawing(s): Eclipse GA1000F Fibreglass 1000L Grease Arrestor (drawn 11 April 2024)
Eclipse GA1500F Fibreglass 1500L Grease Arrestor (drawn 15 April 2024)
Eclipse GA2000F Fibreglass 2000L Grease Arrestor (drawn 15 April 2024)
Eclipse GA3000F Fibreglass 3000L Grease Arrestor (drawn 15 April 2024)
Eclipse GA4000F Fibreglass 4000L Grease Arrestor (drawn 15 April 2024)
Eclipse GA5000F Fibreglass 5000L Grease Arrestor (drawn 15 April 2024)
Eclipse GA1000S Stainless Steel 1000L Grease Arrestor (drawn 11 April 2024)
Eclipse GA1500S Stainless Steel 1500L Grease Arrestor (drawn 11 April 2024)
Eclipse GA2000S Stainless Steel 2000L Grease Arrestor (drawn 11 April 2024)
Eclipse GA3000S Stainless Steel 3000L Grease Arrestor (drawn 11 April 2024)
Eclipse GA4000S Stainless Steel 4000L Grease Arrestor (drawn 11 April 2024)
Eclipse GA5000S Stainless Steel 5000L Grease Arrestor (drawn 11 April 2024)

Authorising person: Stephen Jerkovic (Team Leader – Investigations)

Date issued 30 May 2024

Validity period: Two (2) years