

SCRAPTRAP™

SINK WASTE ARRESTOR FOR USE IN COMMERCIAL & DOMESTIC SINKS

WSA Appraisal: TWA1106
3monkeez
P: 02 9627 6111
www.3monkeez.com.au

MODEL : SCRAP-S-90

RECOMMENDED INSTALLATION PROCEDURE




FIG1

a) Make sure both top and bottom surfaces around the outlet of the sink are clean

b) Remove the plug and basket from the body of the Scraptrap. Un-screw locking nut

c) Apply a bead of silicone to the recess of the outlet and around the flange of the Scraptrap. Place body through 90mm sink outlet as shown in Fig 2.

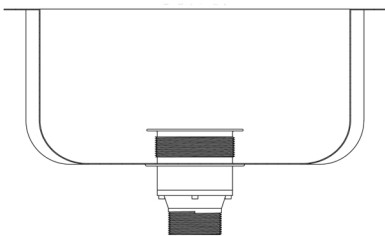


FIG2

d) Ensure rubber seal is in place between locking nut and the bottom of the sink. Tighten locking nut until a water tight seal is achieved as shown in Fig3.

e) Connect 2" trap to AS/NZS 3500 Standard.

f) Place basket back inside body




FIG3