


**Notes:**

- Inlet and Outlet pipes 100mm
- Inspection Openings 100mm
- Grease Arrestor Vent 100mm
- Baffles are 10mm thick PVC welded to walls
- (N1) First baffle is 150mm from base of tank
- (N2) Second baffle is 250mm below waterline for 1000L, 1500L, 2000L, 3000L tanks  
And 350mm below waterline for 4000L, 5000L & 6000L tanks
- All Inlet and Outlet pipes to be in HDPE
- Inlet line to be HDPE or Raupiano Pipe. Outlet line DWV
- Inground Arrestor Lids, Cast Iron as shown in manual and to meet AS3996
- Above Ground Arrestors come with screw down gas tight lids.

MODEL	LENGTH A	WIDTH B	HEIGHT C	INLET D	OUTLET E	BAFFLE 1 F	BAFFLE 2 G	WEIGHT
PCGT1000L	1880 X	1060 X	1160	350	570	580	270	75KG
PCGT1500L	1940 X	1190 X	1300	500	700	770	340	90KG
PCGT2000L	1940 X	1190 X	1300	550	875	830	360	90KG
PCGT3000L	2800 X	1200 X	1300	585	900	1300	460	135KG
PCGT4000L	2900 X	1400 X	1600	725	1100	1400	560	200KG
PCGT5000L	3200 X	1400 X	1800	825	1070	1500	660	250KG
PCGT6000L	3300 X	1600 X	1850	825	1200	1600	760	350KG

**OUTLET SIDE TANK**

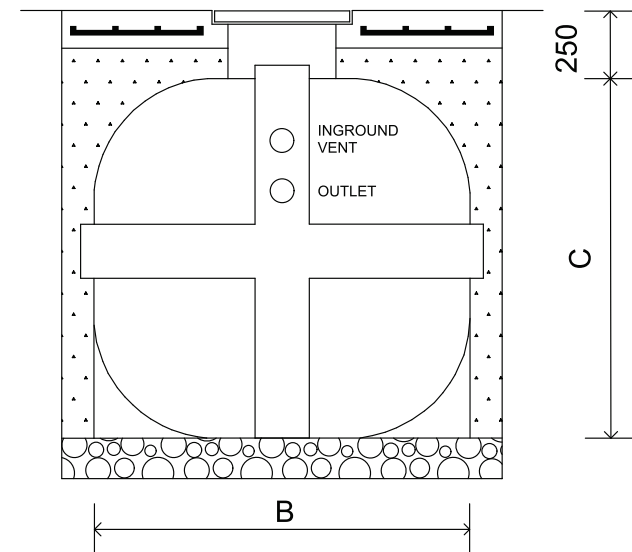

**ABOVE GROUND AND IN-GROUND  
W.A. WATER CORPORATION GREASE ARRESTOR**



PORT CAPITAL PTY. LTD.  
SCALE: N/S

DRAWING NO: WAGA-1 REV: E

DRAWN BY: LR  
08 / 06 / 2021