

PRODUCT NOTE:

1. TESTED AND APPROVED FOR INSTALLATIONS UP TO 5000mm DEEP.
2. 300mm RISERS AVAILABLE.
3. LARGE RANGE OF CONCRETE SURROUNDS AND COVERS TO SUIT ALL LOAD RATINGS.
4. MPA RATING FOR GRC - 60 mpa @ 28 DAYS.
5. AVAILABLE EXTRAS:
-STEP IRONS
-SUPPORT FRAME & WORK PLATFORMS FOR ABOVE GROUND INSTALLATIONS.
6. OTHER PVC PIPE SIZES AVAILABLE UPON REQUEST
7. INSTALLATION INSTRUCTIONS MUST BE FOLLOWED.
8. COVER WILL ADD TO OVERALL DEPTH.


PRODUCT CODE	CAPACITY (L)	A	B	C	D	E	MASS (KG) PIT ONLY
WACP 2	200	600	600	600	1125	350	115
WACP 4	400	900	900	600	1075	300	205
WACP 6	600	900	900	750	1075	150	230
WACP 8	800	1200	1200	720	1225	330	375
WACP 10	1000	1200	1200	900	1525	450	475
WACP 12	1200	1200	1200	1075	1525	275	510
WACP 15	1500	1200	1200	1350	1825	300	570
WACP 20	2000	2050	860	1400	1970	400	720

SPECIFICATION

Glass Reinforced Concrete Cooling Pit Boiler Blowdown must be free of steel reinforcement to prevent corrosion.
Cooling Pit Boiler Blowdown to be Mascot Engineering GRC litre, model number WACP complete with grate and frame to suit Class load rating to AS3996.
Products to be installed as per the manufacturers installation instructions

To calculate the size of the unit required, please follow the calculations in the Water Corporation Typical Drawing No: HX33-18-50.

© Copyright

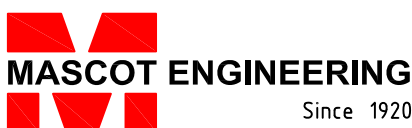

PRODUCT DESCRIPTION:

**WA COOLING PIT /
BOILER BLOWDOWN**

ph: 1300 885 295
fax: 1300 885 296
email: sales@mascoteng.com.au
www.mascotengineering.com.au

SCALE:

NTS

REVISION:

D 0618

DRAWING No:

TW.WA.CP.001