


## **MODEL: SSBW**

## RECOMMENDED INSTALLATION PROCEDURE

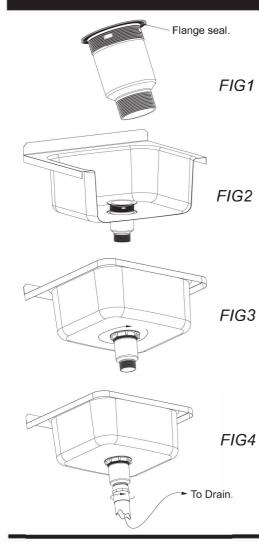

- a) Make sure both top and bottom surfaces around the outlet of the sink are clean
- b) Remove the plug and basket from the body of the Scraptrap. Un-screw flange and disregard the flange seal
- c) Apply a bead of silicone to the recess of the outlet and around the flange of the Scraptrap. Place body through 90mm sink outlet as shown in Fig 2.
- d) Ensure rubber seal is in place between locking nut and the bottom of the sink. Tighten locking nut until a water tight seal is achieved as shown in Fig3.
- e) Connect 2" trap to AS/NZS 3500 Standard.
- f) Place basket back inside body so that the lip sits on top of the ridge approximately 20mm down from the top.